9400 Series

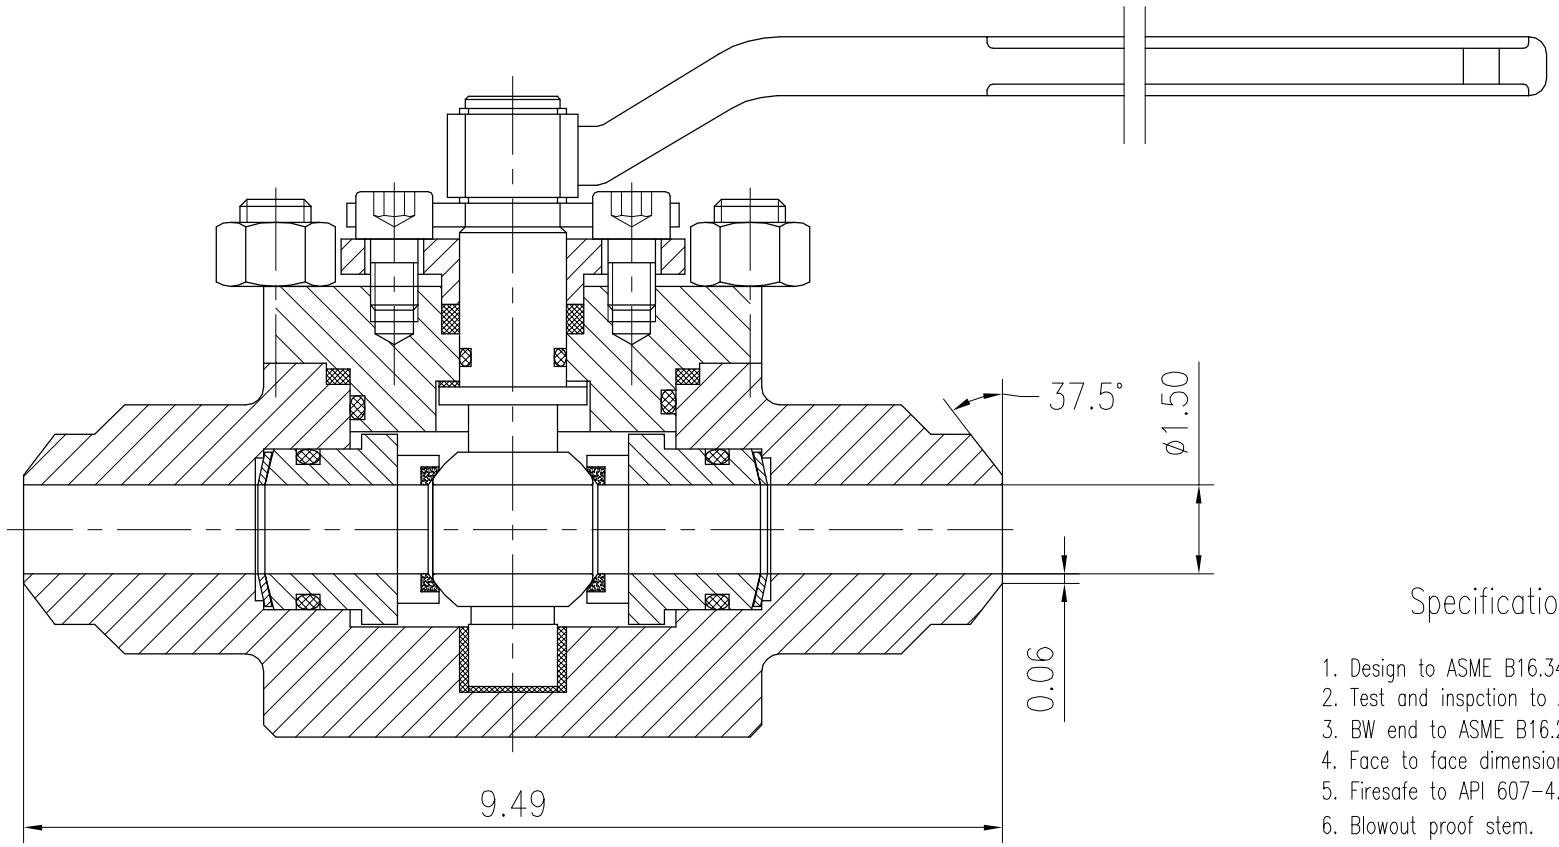

Specification

1. Design to ASME B16.34.
2. Test and inspction to API 6D/API 598.
3. BW end to ASME B16.25.
4. Face to face dimension to factory standard.
5. Firesafe to API 607-4.
6. Blowout proof stem.

Parts	Material	Parts	Material
Body	ASME A182 F316L	Springs	17-4PH
Cap	ASME A182 F316L	Packing	Graphoil
Ball	ASME A182 F316	Gaskets	SS304+Graphite spiral wound gaskets
Seat	RPTFE	O-ring	Viton
Stem	ASME A182 F316	Bolts/Nuts	B8M/8M

DATE	REMARKS	DRAWN

DESIGN		APPROVAL	
DRAWN		SCALE	
CHECK		DATE	

Top Entry Ball Valve

ANSI 600 Size 1.5" Full Port REV △

J-FLOW CONTROLS